



In-Home Warranty

EXHAUST FAN SERIES AVAILABLE IN TWO SIZES IN BOTH ROUND AND SQUARE OPTIONS, 250MM, 300MM WITH TRICOLOUR LED LIGHT

MXFLFR25W/MXFLFS25W/MXFLFR30W/MXFLFS30W



SIDE DUCTING ACCESS WITH DRAFT STOPPER

- Efficient long life ball bearing motor
- Ultra-quiet motor
- Low profile design
- Side duct outlet with draft stopper
- Turbo fan blade design for high efficient air-steam extraction
- Air extraction for model 250mm 290m³/hr and model 300mm 390m³/hr
- Side ducting access with built in draft stopper
- Includes IPX2 Water Resistant Rating (Protects from vertically dripping water)
- Modern ultra-low profile slimline design fascia to ceiling for easy cleaning
- Housing fascia material made from ABS
- Easily removable grill for cleaning

IP Rating
 Fully Concealed Motor Housing
 Draft Stopper
 High Extraction
 Ultra Low Profile
 Easy Side Ducting Access
 High Performance Ball Bearing Motor
 Tricolour


DIMENSIONS

AVAILABLE EXTRAS

FLOW 250MM - 125mm Duct Outlet Size

FLOW 300MM - 150mm Duct Outlet Size

Ducting

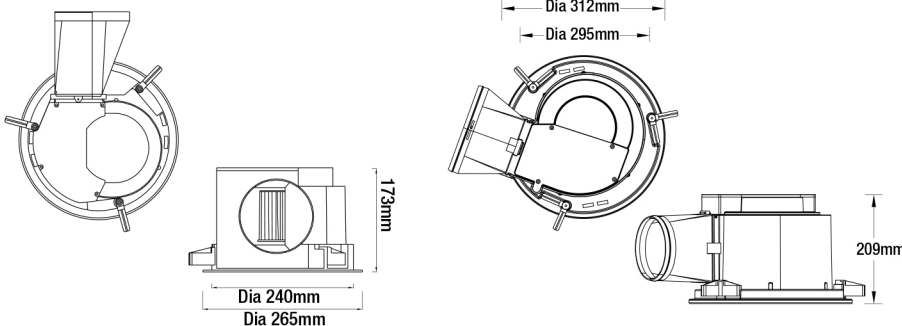

Aust/NZ Approval No. SAA-172776-EA

EXHAUST FAN SERIES AVAILABLE IN TWO SIZES IN BOTH ROUND AND SQUARE OPTIONS, 250MM, 300MM WITH TRICOLOUR LED LIGHT

FEATURES

- 12W Tricolour LED light
- Efficient long life premium ball bearing motor
- Ultra-quiet motor
- Easy installation to ceiling using easy quick mount swivel clip to plaster
- Low profile fascia design
- Ideal for use in multi-storey apartments
- Side duct outlet with draft stopper
- Turbo fan blade design for high efficient air-steam extraction
- Air extraction for model 250mm 290m³/hr and model 300mm 390m³/hr
- Side ducting access with built in draft stopper
- Includes IPX2 Water Resistant (Protective to splashing water)
- Housing fascia material made from ABS
- Easily removable grill for cleaning
- Fitted with easy ducting vent with draft back draft stopper
- Easy Cut Out template included
*(Ducting not included)

SPECIFICATIONS

Rated Power Input/Frequency:	220-240-AC-50Hz
Motor Wattage:	MXFLFR25W & MXFLFS25W: 45W MXFLFR30W & MXFLFS30W: 72W
Motor:	Ball bearing
IP Rating:	IPX2
LED Wattage:	12W
LED Lumens:	800lm
Colour temperature:	3000k, 4000k, 5000k
CRI:	≥ 80
Material - Housing / Fascia:	ABS
Air delivery performance m³/hr:	MXFLFR25W & MXFLFS25W: 290m ³ /hr MXFLFR30W & MXFLFS30W: 390m ³ /hr
Duct Diameter Outlet Size	150mm
Cut Out Size Diameter:	MXFLFR25W & MXFLFS25W: 240mm MXFLFR30W & MXFLFS30W: 295mm
Height:	MXFLFR25W & MXFLFS25W: 173mm MXFLFR30W & MXFLFS30W: 209mm
Minimum Installation Depth:	MXFLFR25W & MXFLFS25W: 210mm MXFLFR30W & MXFLFS30W: 240mm

SHIPPING: FLOW 250

Packaging size	335×318×226mm
Gross weight	2kg
Pallet qty	80

SHIPPING: FLOW 300

Packaging size	405×295×395mm
Gross weight	2.05kg
Pallet qty	60

*For further information regarding warranty terms and conditions, please refer to enclosed warranty statement. Warranty is void unless installed by a licensed electrician.

AVAILABLE IN WHITE ONLY

Model	Colour	Barcode
MXFLFR25W	White	 9312375505167
MXFLFS25W	White	 9312375505150
MXFLFR30W	White	 9312375507109
MXFLFS30W	White	 9312375507116

