





GU10 SPOT II STR4863GU-5W

5 watt GU10 Architectural single circuit track spot

Application


Ideal for decorative retail and interior residential spaces

Design Specifications

- Aluminium body profile
- Powder coat finish in white or black
- GU10 lamp base, 3000K / 4000K / 6000K, CRI >80
- GU10L350 lamp included, beam distribution 38 degree
- 350 degree rotatable (horizontal), 120 degree vertical
- SAL Lamp options: GU10L550, GU10LR750, GULA750 (trailing edge dimmable)

Performance

Dimmable - OPTIONAL Dimmer Type - Trailing edge dimmable lamp GU10LA750

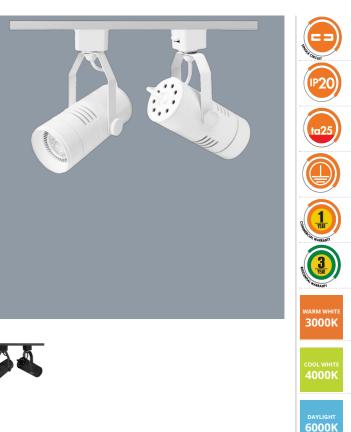

Technical Specification

Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	ССТ (К)	CRI	Beam Angle (°)
STR4863 GU WH	240	5	350	3000/4000/6000	80	38
STR4863 GU BK	240	5	350	3000/4000/6000	80	38

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".



Dimensions

STR4863GU









WHONE BAR AND A CONTROL AND A

I



For more information please scan me





NSW/ACT: 02 9723 3099 QLD: 07 3879 5999 VIC/TAS/SA/NT: 03 9532 3168 WA: 08 9248 7458

© Copyright SAL - All Rights Reserved