



OPAL DIMM LGS14D - 14W

14 watt dimmable LED SMD GLS style opal lamps

Application

Energy efficient LED lamp solutions

Design Specifications

- Opal polycarbonate diffuser, beam distribution 200 degree
- Poly covered aluminium body, B22 and E27 lamp bases
- High efficiency SMD LED chips, CRI > 80
- Integral trailing edge dimmable LED driver
- Colour temperature 3000K / 4000K / 6000K
- 1:1 size to traditional GLS / A60 lamp, dimmable, suits most GLS / A60 lamp fittings, double insulation

Performance

Dimmable - **YES**

Dimmer Type - **TRAILING EDGE**



Technical Specification

Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI	Beam Angle (°)
LGS14/830B22D	240	14	1250	3000	80	240
LGS14/840B22D	240	14	1300	4000	80	240
LGS14/860B22D	240	14	1350	6000	80	240
LGS14/830E27D	240	14	1250	3000	80	240
LGS14/840E27D	240	14	1300	4000	80	240
LGS14/860E27D	240	14	1350	6000	80	240




Model No.	Dimmable	Diameter (mm)	Length (mm)	Base Type
LGS14/830B22D	YES	60	112	B22
LGS14/840B22D	YES	60	112	B22
LGS14/860B22D	YES	60	112	B22
LGS14/830E27D	YES	60	114	E27
LGS14/840E27D	YES	60	114	E27
LGS14/860E27D	YES	60	114	E27


Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

LGS 14D E27

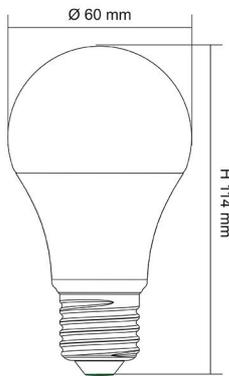

LGS14D B22

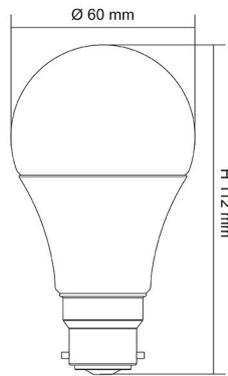

THE SFI SYSTEM ELIMINATES LED FLICKERING.

**SIMPLY
MATCH THE
UNIFIT SFI
DOWNLIGHT
WITH THIS
SDD400SFI
DIMMER.**



**DIM with
FLICKER
CONTROL**

For related
products
please
scan me

